

# GALFAB

## INSIDE/OUTSIDE RAIL ROLL-OFF HOIST

Visit our website at [www.galfab.com](http://www.galfab.com)

### "IO" MODEL With More Standard Features

Replaceable Side  
Roller Shafts

COR-TEN Divider Rail

Common Shaft  
for Inside/Outside  
Rollers

Balanced Long-  
Wearing Hinge  
System

Auto Fold Forward  
ICC Bumper

Container Line Up and Support Rails

Rated Capacity  
60,000 and  
75,000 Lbs.



Larger Oil  
Reservoir with  
more oil to pump

More Side Roller  
Bearing Surface for  
Longer Use and  
Less Maintenance


GALFAB roll-off hoists are designed and built with the user in mind. GALFAB's hoist is jig-built for quality, accuracy, and consistency. GALFAB's auto fold forward DOT bumper folds toward the truck.

E-mail us at [galfab@galfab.com](mailto:galfab@galfab.com)


### **GALFAB, INC.**

612 West 11th Street  
PO BOX 39  
Winamac, IN 46996  
(574) 946-7767  
Fax (574) 946-7994

## INSIDE/OUTSIDE RAIL HOIST

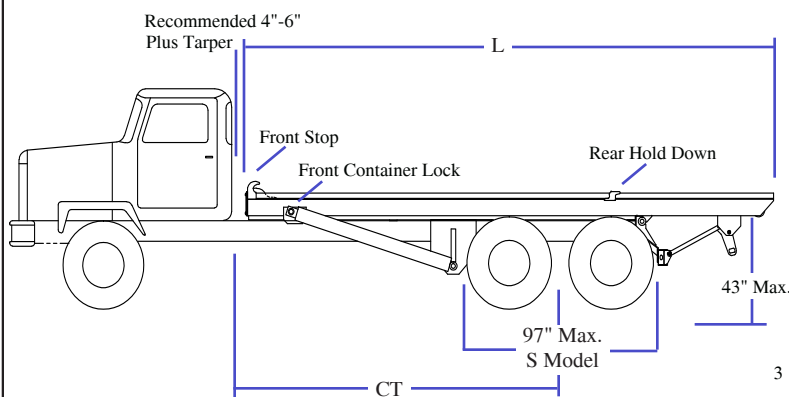

All dimensions are subject to steel and manufacturing tolerances.

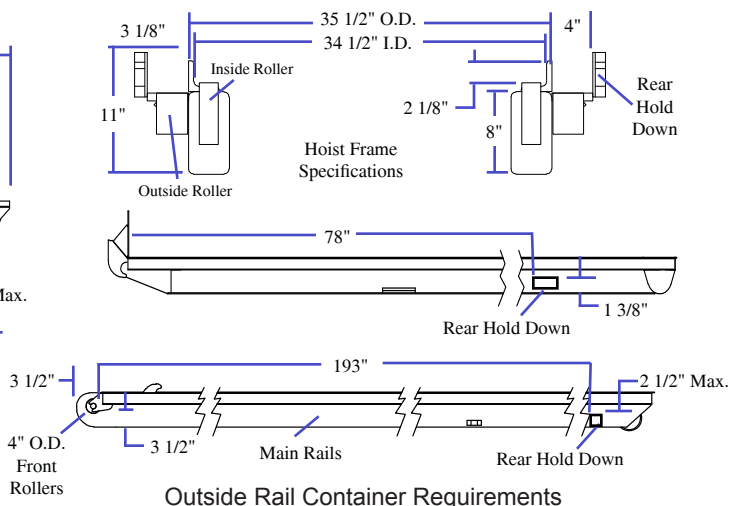

MODEL	IO 60174 S072	IO 60174 T118	IO 60194 T118	IO 75174 T118	IO 75194 T118	IO 60194 T083	IO 60194 T114	IO 60229 T138	IO 60182 S072	IO 60182 T118
Rated Cap.	60,000#	60,000#	60,000#	75,000#	75,000#	60,000#	60,000#	60,000#	60,000#	60,000#
CT	174"	174"	194"	174"	194"	194"	194"	229"	182"	182"
L	23' 4"	23' 4"	25' 0"	23' 2"	25' 0"	24' 11"	24' 11"	28' 5"	24' 0"	24' 0"
Dump Angle	47	47	47	47	47	47	47	46	47	47
Up (sec.)*	30	43	43	43	43	29	49	60	43	43
Down (Sec.)*	13	10	10	10	10	15	20	24	10	10
On (Sec.)*	46	46	51	46	51	46	50	72	46	46
Off (Sec.)*	37	37	42	37	42	40	40	59	37	37
Lift Cyl.	6"- 4.5 x 72" DA	6"- 5-4" x 118" DA	6"- 5-4" x 118" DA	6"- 5-4" x 118" DA	6"- 5-4" x 118" DA	6"- 5" x 83" DA	6"- 5-4" x 114" DA	6"- 5-4" x 138" DA	6"- 4.5 x 72" DA	6"- 5-4" x 118" DA
Winch Cyl.	7"-3" x 80" DA	7"-3" x 82" DA	7"-3" x 90" DA	7"-3" x 82" DA	7"-3" x 90" DA	7"-3" x 92" DA	7"-3" x 92" DA	7"-3" x 92" DA	7"-3" x 82" DA	7"-3" x 82" DA
Cont. Lgth.	16' to 20' IR 18' to 22' OR	16' to 20' IR 18' to 22' OR	20' to 24' IR 20' to 24' OR	16' to 20' IR 18' to 22' OR	20' to 24' IR 20' to 24' OR	20' to 24' IR 20' to 24' OR	20' to 24' IR 20' to 24' OR	24' to 28' IR 24' to 28' OR	16' to 20' IR 18' to 22' OR	16' to 20' IR 18' to 22' OR
Appx. Wgt.	7900#	7900#	8100#	8025#	8325#	7325#	8225#	9125#	7925#	8000#

\*Cycle times are factory developed and controlled by PTO output, oil viscosity, human and mechanical efficiency, and may vary accordingly.

### STANDARD

8" x 4" x 1/2" Tube Main Frame  
 3" x 2" x 1/4" Tube Sub Frame  
 2 1/2" Dia. Steel Rear Hinge (Floating) with  
 129.6 sq. in. of Bearing Surface  
 1 1/4" Steel Plate Front Stops  
 1" Steel Plate Rear Hold Downs  
 1" Spring Loaded Container Locks  
 2 1/2" Dia. Cylinder Lift Shafts  
 7/8" EIPSIWRC Cable Capacity 39 ton min.  
 1 1/2" Dia. Steel Cable Anchor  
 Swage button Cable End with H.D. swivel eye  
 10" O.D. Cable Sheaves with  
 2 1/2" I.D. Bronze Bearing  
 4" O.D. Outside Steel Side Rollers with 2" I.D.,  
 Bronze Bearing Inside Rollers 6" O.D. with 2"  
 I.D., Bronze Bearing Container Long Sill  
 Support Rails  
 Full Width Side Roller Bearings  
 Replaceable Bolt-on Type Side Roller Shafts

52 Gallon Reservoir (50 Gal. Useable)  
 Full Length Suction Screen  
 In Tank Oil Filter  
 2 Spool Valve with inside air controls  
 Outside Controls  
 2" Suction Line  
 Bumper with Recessed Lights  
 Mid Body Turn Signals  
 Truck-Lite Sealed Lighting System  
 Auto Fold Forward DOT Bumper  
 Hoist Servicing Props  
 Hoist Up Alarm - Audible and  
 Cab Light  
 Back Up Alarm - Audible  
 All Working Points Greasable

### OPTIONS

Behind Cab Oil Tank  
 74 Gallon Oil Tank  
 Direct Mount Hydraulic Pump  
 Front Mount Pump  
 Air Shift PTO  
 Electric Air Control PTO  
 Hydraulic Quick Disconnects  
 Steel Tool Box  
 Rear Stabilizer Roller 10" O.D.  
 Auxiliary Fold Down Stops  
 Tandem Steel or Poly Fenders  
 Tri-Axle Steel or Poly Fenders  
 Auxiliary Lift Axles  
 Factory Installation  
 Tarping Systems  
 Pintle Hook  
 3 spool valve in lieu of 2 spool  
 3" x 2" x 5/16" Subframe  
 Automatic Container Securement  
 LED Lights  
 "THE HOOKER" Air Operated Auto  
 Rear Hold On  
 "Ratchet" Tie Down Nylon Straps

**!CAUTION!** This equipment should be operated by properly trained personnel. Improper use, misuse or lack of maintenance could cause injury to people and/or property. Photos used in this brochure are illustrative only. We reserve the right to make changes at any time without notice. Information contained within this literature is intended to be the most accurate available at the time of printing.

DISTRIBUTED BY:

**GALFAB, INC.**

612 West 11th Street  
 PO BOX 39  
 Winamac, IN 46996  
 (574) 946-7767  
 Fax (574) 946-7994