

**Sanitary
Equipment
Co., Inc.**

SALES PARTS SERVICE



DO IT RIGHT THE FIRST TIME

Committed to delivering equipment
that meets immediate needs
and exceeds expectations
for years to come.

INDUSTRY LEADING EQUIPMENT



SHOP OEM PARTS AT SANITARYEQUIPMENT.COM

25 Industry Dr
West Haven, CT 06516
(203) 933-9599

1140 Turnpike St., Unit 3&4
Stoughton, MA 02072
(855) 373-7324



Expert Series



Expert Series

DROP FRAME FLEXIBILITY, BECAUSE EVERY ROUTE IS DIFFERENT

Introducing the Expert Series, the most versatile waste collection vehicle on the market. Since 1984, we've been performing our own factory drop frame modifications, enabling us to offer customized solutions to meet our customers' unique needs.

The Expert is designed for efficient waste collection, whether it's manual, semi-automated, or fully automated. Hopper access from both curbside and street side makes it easy to collect waste in alleys and one-way streets. With various configurations and numerous options available, it's hard to find a situation where the Labrie™ Expert wouldn't be a perfect fit.

Laying the foundations for a truly exceptional product.

LABRIE™ INNOVATIONS

With a strong emphasis on innovation, Labrie's engineering team has crafted a comprehensive range of customizable options to cater to even the most stringent customer requirements. We are poised and eager to embrace emerging industry trends and fulfill evolving customer demands. This perpetual cycle of innovation positions Labrie™ as the forefront leader in side loader solutions across North America.

WEIGHT DISTRIBUTION

Over years of innovation, Labrie™ trucks prioritize ideal weight distribution in all models. Our ongoing objective is to achieve the perfect material balance, ensuring models collect more waste while maintaining the highest legal payload.



ENVIROLINK™ HAS LAID THE FOUNDATIONS FOR A BRAND-NEW ERA IN TRUCK INTELLIGENCE.

An improved multiplex network and analog system, cameras and monitors, scales, diagnostic tools, safety interlocks, alerts, GPS tracking, and more are now packaged in a more precise, reliable, and efficient Smart Collection Package.

The rounded, tapered shape of the body maximizes compaction by concentrating material at the back.

15 yd³ to 37 yd³ body sizes

AR Steel liners on the hopper floor and side walls

Proportional joystick, electric over hydraulic

Crusher panel

Tailgates ranging from 0 yd³ to 6 yd³ based on body capacity

Tailgate auto-latch closes straight down to protect rubber seal

Zinc-plated hydraulic tubing

Helping Hand™

- 10 foot reach
- 400 lb lifting capacity
- 13 sec packing cycle

Dual Helping-Hand™ configuration available

Hopper enclosed arm dumps directly into packer area

New sump box 700% larger

	AUTOMATED	MANUAL	RESIDENTIAL	COMMERCIAL	DEMOLITION	ORGANICS	ALLEYS TIGHT AREAS	RECYCLING	TIPTO DUMP	FULL EJECT	SPLIT BODY	50>82 DGE	50>96 DGE	50>100 DGE	60>97 DGE	FRAME	ROOF	CAB	TAILGATE	EV
Expert Series	●	●	●				●	●	●		●									●



IN-HOUSE DROP FRAME MODIFICATION

Labrie™ is the only manufacturer that conducts the drop frame modification process in-house. This gives us direct control over the process, ultimately benefiting our clients.



MANUAL, SEMI-AUTOMATED OR AUTOMATED COLLECTION

The Expert drop frame configuration excels in manual or semi-automated waste/recycling collection, featuring a low loading height.




SPLIT BODY VERSATILITY

50/50, 40/60, or 60/40-split configuration for maximizing payload and adapting route diversion rates.



SINGLE SHEET OF STEEL ON THE BODY SIDES

Enhanced strength and a seamless canvas for graphics, providing greater structural integrity, eliminating the need for reinforcement posts, and reducing the potential for weld seam cracks & corrosion.

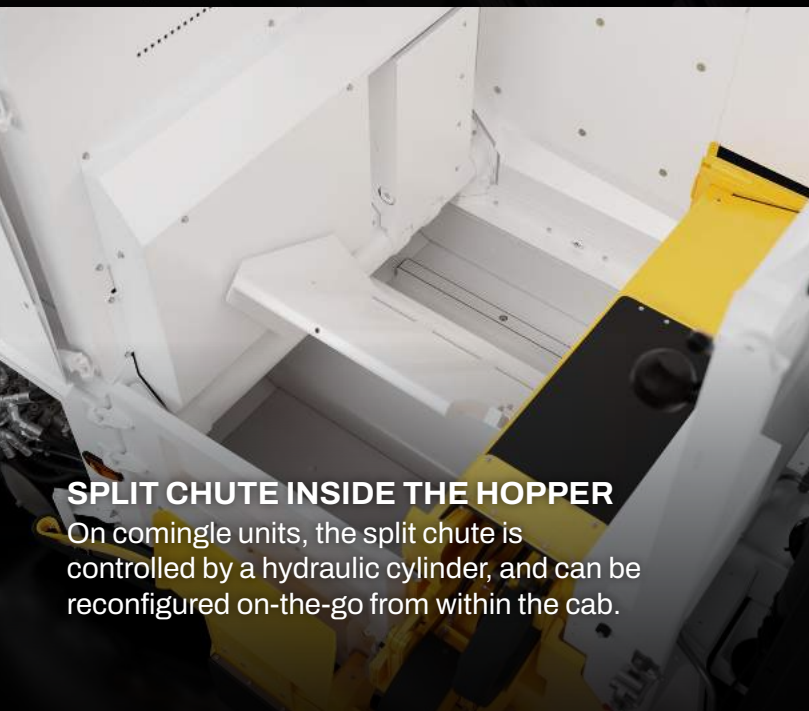

SPLIT CHUTE INSIDE THE HOPPER

On comingle units, the split chute is controlled by a hydraulic cylinder, and can be reconfigured on-the-go from within the cab.




ENCLOSED HOPPER

Ideal for preventing waste from flying onto the road and for keeping water, snow, and ice from accumulating overnight.

Expert Series Specifications


Body Specifications		Arm Specifications (Automated Units)		Hydraulic Specifications	
Body Floor	3/16" 50W 50,000 psi	Arm Lift Capacity	400 lbs	Pump	Single Vane (Manual) / Dual Vane (Automated)
Body Sides (lower)	10ga A1011 80,000psi	Arm Reach	84" (120" optional)	Pump Capacity (Manual)	38 gpm@1200 rpm
Body Roof	12ga A1011 80,000psi	Swing out	16"	Pump Capacity (Automated)	BODY: 20 gpm@700 rpm; ARM: 16 gpm@700 rpm
Tailgate	12ga A1011 80,000psi	Arm Controls	Proportional joystick, electric over hydraulic	Max. Operating Pressure	3,000 psi (2,000 psi on single axle chassis)
Cylinder Specifications		Hopper Specifications		Oil Reservoir (conventional cab)	65 gal
Body Lifting Cylinder (15-20 yd³ bodies)	4 stages 6-1/16" bore x 150" stroke	Hopper Size (yd³)	4	Packer Specifications	
Body Lifting Cylinder (22 yd³ bodies)	4 stages 6-1/16" bore x 165" stroke	Loading Height	5-1/2" above frame	Compaction ratio (lbs/yd³)	850 (600 on single axle chassis)
Body Lifting Cylinder (27-31 yd³ bodies)	4 stages 6-1/16" bore x 180" stroke	Hopper Floor	3/16" 50W 50,000 psi	Packer Panel Face Plate	1/4" 100QT 100,000 psi
Packer Cylinders	4" bore x 2-1/2" rod x 40" stroke	Hopper Floor wear plates	1/4" AR500 190,000psi	Packer width	71"
Crusher Panel Cylinder	2" bore x 1-1/2" rod x 14-1/2" stroke	Hopper Sides (lower)	3/16" AR200 70,000 psi	Packer height	18"
Tailgate Cylinders	2-1/2" bore x 1-3/4" rod x 39" stroke	Hopper Sides wear plates	0.157" AR450 175,000psi	Packer stroke	50"
Arm extension Cylinder (84" reach)	2" bore x 1-1/4" rod x 70" stroke	Hopper Slope	1/4" AR500 190,000psi		
Arm extension 2nd Cylinder (120" reach)	2" bore x 1-1/4" rod x 36" stroke	Hopper Slope wear plates	1/4" AR500 190,000psi		
Lifting Cylinder	3" bore x 1-1/2" rod x 16" stroke				
Grabber Cylinder	1-1/2" bore x 1" rod x 6-1/4" stroke				

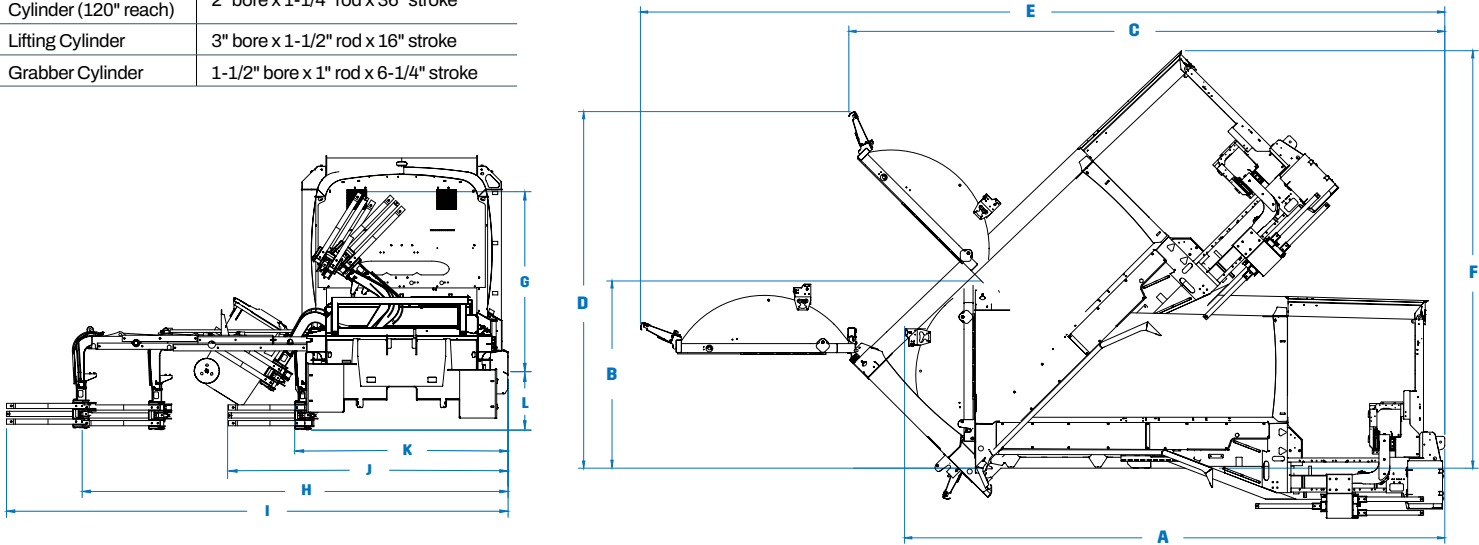

Body Dimensions	15YD³	17YD³	20YD³	22YD³	24YD³	24YD³	26YD³	27YD³	29YD³	31YD³	33YD³	31YD³	33YD³	35YD³	37YD³
	(15+0)	(15+2)	(20+0)	(20+2)	(20+4)	(22+2)	(22+4)	(27+0)	(27+2)	(27+4)	(27+6)	(31+0)	(31+2)	(31+4)	(31+6)
A. Overall Length, Tailgate Closed (in.)	239	248	240	245	258	261	274	280	285	298	313	310	315	328	343
Overall Width (in.)	102	102	102	102	102	102	102	102	102	102	102	102	102	102	102
B. Overall Height Above Frame, Tailgate Closed (in.)	82	82	103	103	103	103	103	103	103	103	103	103	103	103	103
C. Overall Length, Tailgate Open (in.)	281	281	289	289	289	305	305	329	329	329	329	359	359	359	359
D. Overall Height Above Frame, Tailgate Open (in.)	165	165	197	197	197	197	197	197	197	197	197	197	197	197	197
E. Overall Length, Dumping Position (in.)	375	375	403	403	403	419	419	444	444	444	444	470	470	470	470
F. Overall Height Above Frame, Dumping Position (in.)	185	185	201	201	201	213	213	230	230	230	230	244	244	244	244
G. Overall Height Above Frame When Dumping (in.)	86	86	86	86	86	86	86	86	86	86	86	86	86	86	86
H. Overall Width, Arm Out (STD), Grabber Closed (in.)	204	204	204	204	204	204	204	204	204	204	204	204	204	204	204
I. Overall Width, Arm Out (LONG REACH), Grabber Closed (in.)	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240
J. Overall Width, Arm In, Grabber Closed (in.)	134	134	134	134	134	134	134	134	134	134	134	134	134	134	134
K. Overall Width, Arm In, Grabber Open (in.)	102	102	102	102	102	102	102	102	102	102	102	102	102	102	102
L. Distance between bottom of Grabber & chassis frame rail (in.)	22/28	22/28	22/28	22/28	22/28	22/28	22/28	22/28	22/28	22/28	22/28	22/28	22/28	22/28	22/28

Performance Specifications			
Arm In (72" reach)	2.4 sec @ 700 rpm	Grabber Open	1.3 - 1.8 sec @ 700 rpm
Arm In (84" reach)	2.8 sec @ 700 rpm	Grabber Close	1.0 - 1.5 sec @ 700 rpm
Arm In (120" reach)	4.5 sec @ 700 rpm	Packer complete cycle without regeneration	12 sec @ 1200 rpm
Arm Out (72" reach)	3.2 sec @ 700 rpm	Packer complete cycle with regeneration	14 sec @ 700 rpm
Arm Out (84" reach)	3.7 sec @ 700 rpm	Tailgate Open	21 sec @ 700 rpm
Arm Out (120" reach)	6.0 sec @ 700 rpm	Tailgate Close (with Safety Flow limiter)	26 sec @ 700 rpm
Arm Up	2.5 - 3.0 sec @ 700 rpm	Body Up (depending on body size)	30-40 sec @ 700 rpm
Arm Down	2.5 - 3.0 sec @ 700 rpm	Body Down (depending on body size)	15-25 sec @ 700 rpm
		Crusher panel Up	4 sec @ 700 rpm
		Crusher panel Down	3 sec @ 700 rpm
		Hydraulic chute to curb side	4 sec @ 700 rpm
		Hydraulic chute to street side	4 sec @ 700 rpm

Note: Specifications subject to change without notice

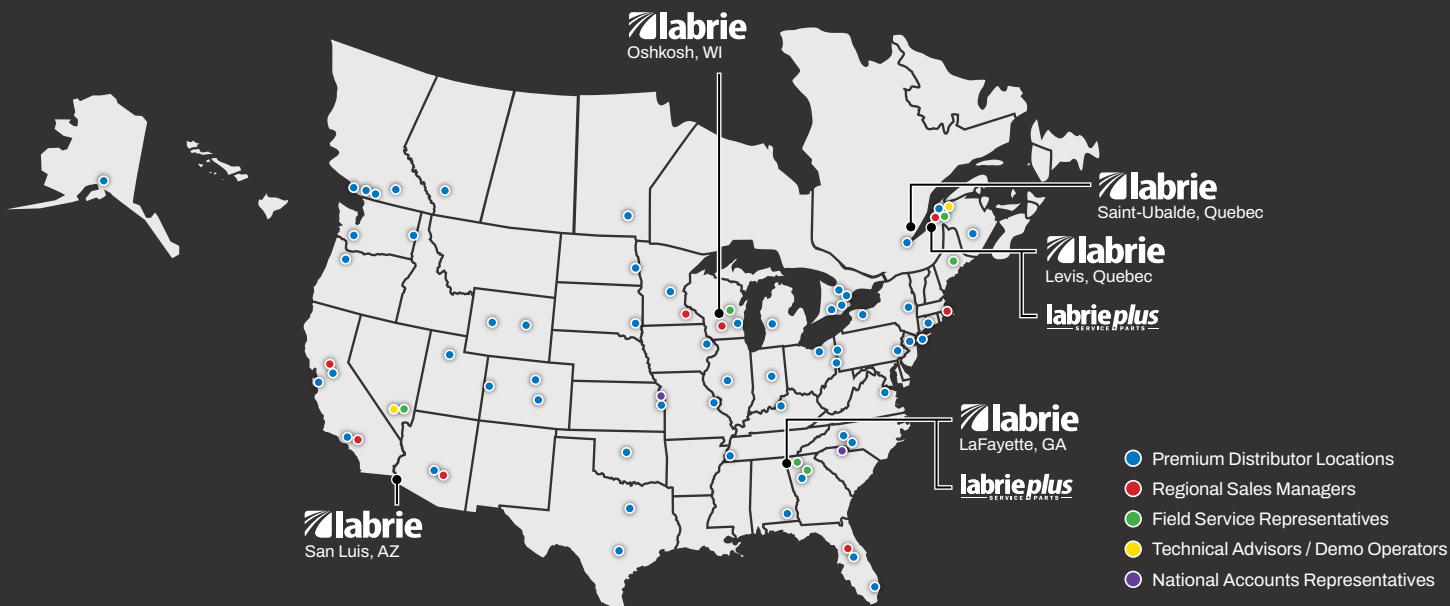

Our North American network is dedicated to quality.

Labrie™ trucks are supported by over 30 top-tier distributors spanning across 50+ sites in the US and Canada, guaranteeing a commitment to driving excellence and providing expert support.



Opt for the Labrie™ Pronto Stock Program when a pre-built model makes sense. Benefit from expedited delivery, cost savings, and a wide selection of models designed to cater to even the most demanding collection needs.



With Sourcewell, save time and money by combining the buying power of more than 50,000 government, education, and nonprofit organizations.



DRIVE EXCELLENCE™



175-B, route Marie-Victorin, Lévis, Quebec, Canada, G7A 2T3
Toll Free: 1-800-463-6638 | Telephone: 418-831-8250
sales@labriegrup.com | www.labriegrup.com



United States of America
1198 Shattuck Industrial Blvd, Lafayette, GA, 30728
Toll Free: 1-800-231-2771
usa.labrieplus.com | partscenter@labrieplus.com

Canada
175-A, route Marie-Victorin, Levis, Quebec, Canada, G7A 2T3
Toll Free: 1-877-452-2743
canada.labrieplus.com | labrieplusqc@labrieplus.com

**Sanitary
Equipment
Co., Inc.**

SALES PARTS SERVICE

DO IT RIGHT THE FIRST TIME

Committed to delivering equipment
that meets immediate needs
and exceeds expectations
for years to come.



INDUSTRY LEADING EQUIPMENT



SHOP OEM PARTS AT SANITARYEQUIPMENT.COM

25 Industry Dr
West Haven, CT 06516
(203) 933-9599

1140 Turnpike St., Unit 3&4
Stoughton, MA 02072
(855) 373-7324