

**Sanitary
Equipment
Co., Inc.**

SALES PARTS SERVICE

DO IT RIGHT THE FIRST TIME

Committed to delivering equipment
that meets immediate needs
and exceeds expectations
for years to come.

INDUSTRY LEADING EQUIPMENT



SHOP OEM PARTS AT SANITARYEQUIPMENT.COM

25 Industry Dr
West Haven, CT 06516
(203) 933-9599

1140 Turnpike St., Unit 3&4
Stoughton, MA 02072
(855) 373-7324



Push Camera Systems

Rausch USA has partnered with minCam to offer their industrial grade push camera systems.

- minCord - compact hand-held system with 1/2" diameter camera
- mc Series - fundamental single-reel camera systems with four different cable/camera combos for a wide variety of applications
- mc Duo Series - two systems combined into a single unit, features dual reels & cameras to cover a range of applications
- minCam360 - 360° pan & tilt push camera with 4-step digital zoom and tri-band sonde



Specifications

System	Cable	Camera	Range
minCord	50 ft. Push/Pull cable	KK13	0.6" - 3"
mc15	100 ft. 5.6mm cable	KK18	1.2" - 5"
mc30	100 ft. 6.7mm cable	KK29SL self-leveling	2" - 8"
mc50	200 ft. 9.2mm cable	KK55SL self-leveling	3" - 16"
mc80	425 ft. 11.2mm cable	KK55SL self-leveling	4" - 16"
mc30 Duo	Inner: 50 ft. Push-Pull Outer: 100 ft. 6.7mm	Inner: KK13 Outer: KK29SL	0.6" - 8"
mc50 Duo	Inner: 65 ft. 6.7mm Outer: 200 ft. 9.2mm	Inner: KK29SL Outer: KK55SL	2" - 16"

Please request a minCam Product Catalog for more information.

minCam360 Pan & Tilt Push System

The minCam360 push system is equipped with an innovative pan & tilt push camera. The extremely small and short 360° pan & tilt camera head allows the viewer to see in all directions, and even steer into branches with the RID steering skid.

System Specifications

- 200 ft. (60m) of 9.2mm fiberglass push cable (up to 300 ft.)
- Integrated dual-band 512Hz/33kHz sonde
- Electronic on-screen distance counter
- 2 removable Lithium Ion batteries for 4+ hours operation
- Power Supply: 100 - 240V AC; 12V DC Car adapter
- Lightweight stainless steel and carbon reel cage
- Mechanical reel brake
- Control unit: On/off switch, light regulation, sonde frequency control, preset camera macros, BNC video out
- Wireless remote control with joystick for pan & tilt, 4X zoom control, light regulation, preset camera macros
- Weight: 49 lbs.; Dimensions: 23" x 26" x 12" (L x H x W)




Monitor & Recording

- 8.4" TFT LCD sunlight readable, records video, voice and photo
- Pelican® Storm Case heavy-duty housing
- SD card reader, max 32 GB for approx. 20 hours of video
- MPEG-4 Video (.avi, 800x600); Pictures (.bmp 640x480)
- Integrated Qwerty keyboard text generator

SK50 Pan & Tilt Camera

Range	3" - 16" (70-400mm)
Pan & Tilt	Infinite 360° pan / tilt range - 150° viewing angle
Zoom / Focus	4-step digital zoom / automatic mechanical focus
Video Quality	High-resolution 520 TVL
Lighting	10 self-adjusting "smart" LEDs
Lens	3.5mm sapphire glass
Water Tight	Up to 85 psi
Outer diameter	1.96" (50mm)
Cylindrical length	1.25" (32mm) / Full length: 3.2" (80mm)

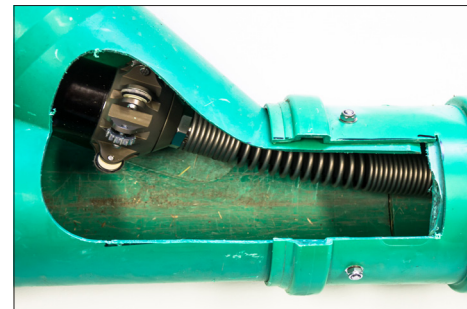

**Sanitary
Equipment
Co., Inc.**

SALES PARTS SERVICE

DO IT RIGHT THE FIRST TIME

Committed to delivering equipment
that meets immediate needs
and exceeds expectations
for years to come.

INDUSTRY LEADING EQUIPMENT



SHOP OEM PARTS AT SANITARYEQUIPMENT.COM

25 Industry Dr
West Haven, CT 06516
(203) 933-9599

1140 Turnpike St., Unit 3&4
Stoughton, MA 02072
(855) 373-7324