

GALFAB

INSIDE/OUTSIDE RAIL ROLL-OFF HOIST

"IO" MODEL With More Standard Features

Replaceable Side
Roller Shafts

COR-TEN Divider Rail

Common Shaft
for Inside/Outside
Rollers

Balanced Long-
Wearing Hinge
System

Auto Fold Forward
ICC Bumper

Container Line Up and Support Rails

Rated Capacity
60,000 and
75,000 Lbs.



Larger Oil
Reservoir with
more oil to pump


More Side Roller
Bearing Surface for
Longer Use and
Less Maintenance

GALFAB roll-off hoists are designed and built with the user in mind. GALFAB's hoist is jig-built for quality, accuracy, and consistency. GALFAB's auto fold forward DOT bumper folds toward the truck.


GALFAB, INC.

612 West 11th Street
PO BOX 39
Winamac, IN 46996

INSIDE/OUTSIDE RAIL HOIST

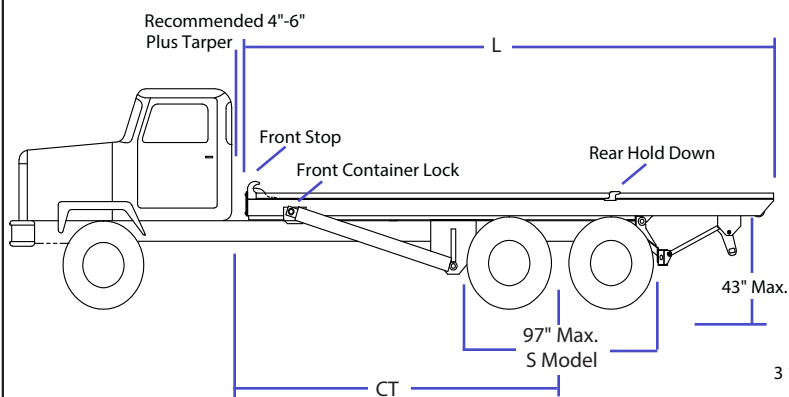

All dimensions are subject to steel and manufacturing tolerances.

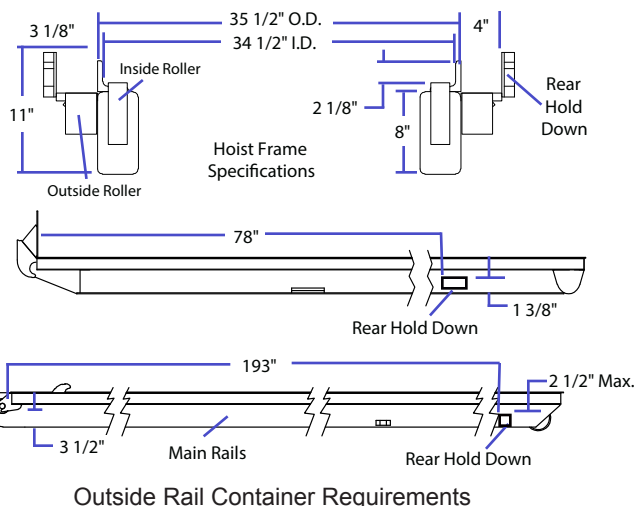

MODEL	IO 60174 S072	IO 60174 T118	IO 60194 T118	IO 75174 T118	IO 75194 T118	IO 60194 T083	IO 60194 T114	IO 60229 T138	IO 60182 S072	IO 60182 T118
Rated Cap.	60,000#	60,000#	60,000#	75,000#	75,000#	60,000#	60,000#	60,000#	60,000#	60,000#
CT	174"	174"	194"	174"	194"	194"	194"	229"	182"	182"
L	23' 4"	23' 4"	25' 0"	23' 2"	25' 0"	24' 11"	24' 11"	28' 5"	24' 0"	24' 0"
Dump Angle	47	47	47	47	47	47	47	46	47	47
Up (sec.)*	30	43	43	43	43	29	49	60	43	43
Down (Sec.)*	13	10	10	10	10	15	20	24	10	10
On (Sec.)*	46	46	51	46	51	46	50	72	46	46
Off (Sec.)*	37	37	42	37	42	40	40	59	37	37
Lift Cyl.	6"- 4.5 x 72" DA	6"- 5-4" x 118" DA	6"- 5-4" x 118" DA	6"- 5-4" x 118" DA	6"- 5-4" x 118" DA	6"- 5" x 83" DA	6"- 5-4" x 114" DA	6"- 5-4" x 138" DA	6"- 4.5 x 72" DA	6"- 5-4" x 118" DA
Winch Cyl.	7"-3" x 80" DA	7"-3" x 82" DA	7"-3" x 90" DA	7"-3" x 82" DA	7"-3" x 90" DA	7"-3" x 92" DA	7"-3" x 92" DA	7"-3" x 92" DA	7"-3" x 82" DA	7"-3" x 82" DA
Cont. Lgth.	16' to 20' IR 18' to 22' OR	16' to 20' IR 18' to 22' OR	20' to 24' IR 20' to 24' OR	16' to 20' IR 18' to 22' OR	20' to 24' IR 20' to 24' OR	20' to 24' IR 20' to 24' OR	20' to 24' IR 20' to 24' OR	24' to 28' IR 24' to 28' OR	16' to 20' IR 18' to 22' OR	16' to 20' IR 18' to 22' OR
Appx. Wgt.	7900#	7900#	8100#	8025#	8325#	7325#	8225#	9125#	7925#	8000#

*Cycle times are factory developed and controlled by PTO output, oil viscosity, human and mechanical efficiency, and may vary accordingly.

STANDARD

8" x 4" x 1/2" Tube Main Frame
 3" x 2" x 1/4" Tube Sub Frame
 2 1/2" Dia. Steel Rear Hinge (Floating) with
 129.6 sq. in. of Bearing Surface
 1 1/4" Steel Plate Front Stops
 1" Steel Plate Rear Hold Downs
 1" Spring Loaded Container Locks
 2 1/2" Dia. Cylinder Lift Shafts
 7/8" EIPSIWRC Cable Capacity 39 ton min.
 1 1/2" Dia. Steel Cable Anchor
 Swage button Cable End with H.D. swivel eye
 10" O.D. Cable Sheaves with
 2 1/2" I.D. Bronze Bearing
 4" O.D. Outside Steel Side Rollers with 2" I.D.,
 Bronze Bearing Inside Rollers 6" O.D. with 2"
 I.D., Bronze Bearing Container Long Sill
 Support Rails
 Full Width Side Roller Bearings
 Replaceable Bolt-on Type Side Roller Shafts

52 Gallon Reservoir (50 Gal. Useable)
 Full Length Suction Screen
 In Tank Oil Filter
 2 Spool Valve with inside air controls
 Outside Controls
 2" Suction Line
 Bumper with Recessed Lights
 Mid Body Turn Signals
 Truck-Lite Sealed Lighting System
 Auto Fold Forward DOT Bumper
 Hoist Servicing Props
 Hoist Up Alarm - Audible and
 Cab Light
 Back Up Alarm - Audible
 All Working Points Greasable

OPTIONS

Behind Cab Oil Tank
 74 Gallon Oil Tank
 Direct Mount Hydraulic Pump
 Front Mount Pump
 Air Shift PTO
 Electric Air Control PTO
 Hydraulic Quick Disconnects
 Steel Tool Box
 Rear Stabilizer Roller 10" O.D.
 Auxiliary Fold Down Stops
 Tandem Steel or Poly Fenders
 Tri-Axle Steel or Poly Fenders
 Auxiliary Lift Axles
 Factory Installation
 Tarping Systems
 Pintle Hook
 3 spool valve in lieu of 2 spool
 3" x 2" x 5/16" Subframe
 Automatic Container Securement
 LED Lights
 "THE HOOKER" Air Operated Auto
 Rear Hold On
 "Ratchet" Tie Down Nylon Straps

!CAUTION! This equipment should be operated by properly trained personnel. Improper use, misuse or lack of maintenance could cause injury to people and/or property. Photos used in this brochure are illustrative only. We reserve the right to make changes at any time without notice. Information contained within this literature is intended to be the most accurate available at the time of printing.

DISTRIBUTED BY:

SANITARY EQUIPMENT CO., INC.



Corporate Office: (203) 933-9599 25 Industry Drive, West Haven, CT, 06516

MA location: (855) 373-SECI 1140 Turnpike Street, Unit 3 & 4, Stoughton, MA, 02072

GALFAB, INC.

612 West 11th Street
 PO BOX 39
 Winamac, IN 46996